
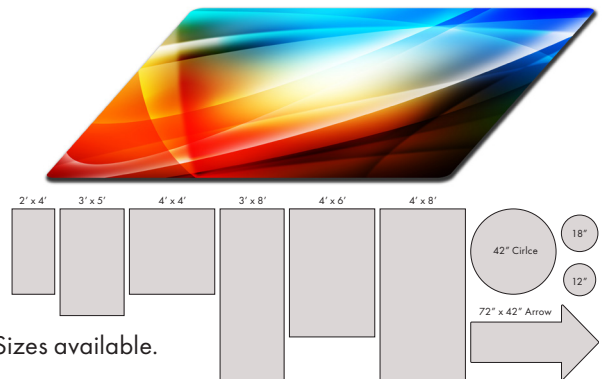


Indoor Surface Grip

Product Parts

1 - Graphic

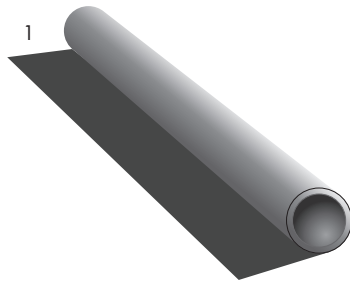


Sizes available.

Display Set-Up

Step 1

Unroll the Graphic (1) and locate desired location.

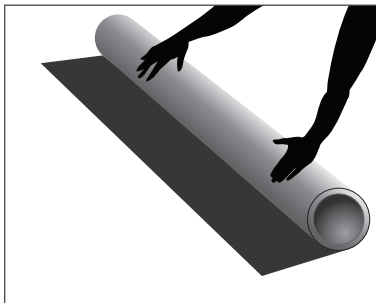

Step 3

Snap a line or otherwise mark the perimeter of the application surface.

Peel a 6" strip of liner from the back side of graphic and crease the liner, being careful not to touch the adhesive.

Orient the graphic to the surface, gently apply the exposed adhesive surface, and slowly continue to apply the graphic by removing the balance of the liner as you are hand applying. Do not remove the entire liner before applying, as this may cause excessive air bubbles.

Use a soft rubber roller or squeegee on the surface of the graphic to remove any air bubbles, and make sure you get 100% adhesion to the surface.

Surface Grip is REPOSITIONABLE and will work on walls, and flooring.

Step 4

*Removal:

To remove the graphic, simply lift one corner and continue to pull back slowly.

Step 2

Surface Preparation:

Prior to application, remove loose dirt or particles from application surface. Extremely dirty surfaces may require washing before application, but the surface must be completely dry before the graphic is applied.

Recommended minimum surface application temperature is 50 degrees Fahrenheit.

Service temperature range is 20 degrees F to 150 degrees F.

** When removed it will not leave adhesive residue.*

Storage & Care

DO NOT FOLD YOUR INDOOR SURFACE GRIP.

Store in a cool, dry place. Scuff marks or dirt can be removed with a mild detergent and a clean, damp cloth.