


5FT X 7.5FT LUMIÈRE LIGHT WALL

LUMIÈRE LIGHT WALL

PRODUCT CODE: LLW2X3



On frame On graphic

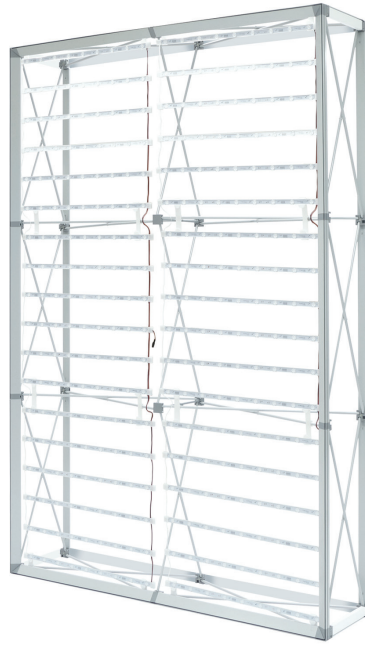

PRODUCT DESCRIPTION

Illuminate your message with the Lumière Light Wall! Lumière ladder lights make backlit graphics pop on this innovative combo display of silicone-edge graphics and portable RPL fabric pop ups. Plus, the Lumière shrinks down in size: simply collapse the geometric frame and the SEG bungeed channel bars, and fold or roll the fabrics graphics. Setup requires 1 person and 5-10 minutes. SEG portability is easy and stylish.

DISPLAY DIMENSION	59.25" W x 88.75" H x 14.5" D
GRAPHIC DIMENSIONS	59.25" W x 88" H

GRAPHIC MATERIAL

UV Backlit Fabric

GRAPHIC FINISHING

Silicone beading is sewn around the perimeter of the fabric graphic. Silicone beading is hidden from view once installed.

DISPLAY CONSTRUCTION

Aluminum Frame

LADDER LIGHTS SPECIFICATION

EACH LIGHT BEAD	0.8W
ANGLE	160°
OPERATING VOLTAGE	DC12V/24V
TOTAL WATTAGE	259.2W
TOTAL AMPERAGE	21.6A
TRANSFORMER SPECIFICATION	
OUTPUT	12V/29A
INPUT	100-120VAC/6.8A 200-240VAC/3.4A 50/60Hz

SHIPPING WEIGHTS & DIMENSIONS

Lumière Ladder Lights

Shipping Weight	31 lbs
Shipping Dimensions	13" L x 12" W x 37" H

Lumière Light Wall

Shipping Weight	20 lbs (frame only) 24 lbs (with graphics)
Shipping Dimensions	34" L x 14" W x 9" H

LARGE QUANTITY FREIGHT

Lumière Ladder Lights

Freight Shipping	24 boxes per 48" L x 40" W x 74" H skids
Freight Weight	222 lbs

Lumière Light Wall

Freight Shipping	15 boxes per 48" L x 40" W x 48" H skids
Freight Weight	240 lbs (frame only) 288 lbs (with graphics)

GRAPHIC TURN AROUND TIME

2 business days after proof approval

AVAILABLE ACCESSORIES

Stabilization Feet	Straight Link Connector
L Link Connector	

AVAILABILITY CA and PA



Channel Bars on Frame



Ladder Lights



Straight Link Connector (Optional)



L Link Connector (Optional)



5FT X 7.5FT LUMIÈRE LIGHT WALL

LUMIÈRE LIGHT WALL

PRODUCT CODE: LLW2X3

PARTS LIST




Qty 1 - Pop Up Frame



Qty 4 - 2 Section Channel Bars



Qty 4 - 3 Section Channel Bars

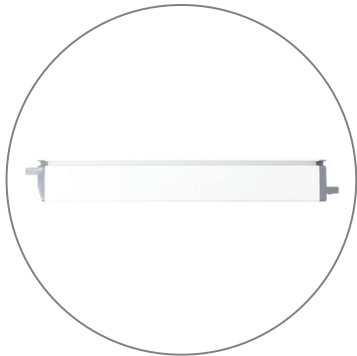


Qty 4 - End Cap Channel Bars



Qty 1 - Carry Bag



Qty 1 - Channel Bar Bag

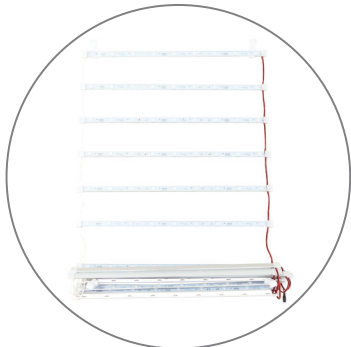

Qty 2 - Ladder Lights



Qty 2 - Transformers




Qty 1 - Transformer Power Cord



Qty 2 - Male / Female
Transformer Connector Cords



Qty 8 - Top/Bottom
Light Bracket

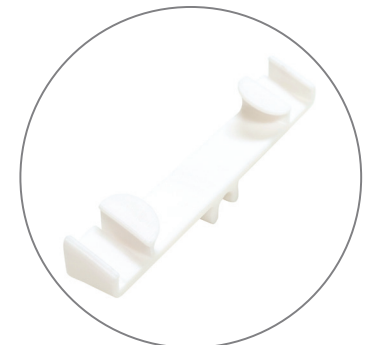

Qty 8 - Middle Light Brackets

5FT X 7.5FT LUMIÈRE LIGHT WALL

LUMIÈRE LIGHT WALL


PRODUCT CODE: LLW2X3

SET UP INSTRUCTIONS


Set Up Pop Up Frame



a. Place frame with the adjustable feet facing down.




b. Expand the frame.

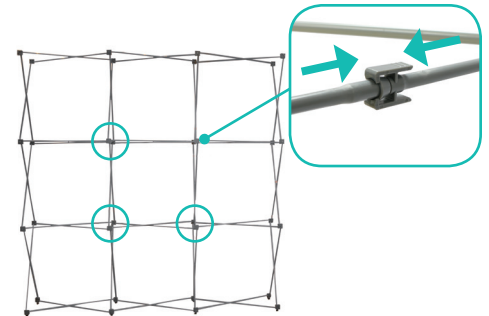


c. Close frame by pushing the outside of the frame until male and female ends connect.


Insert Channel Bars

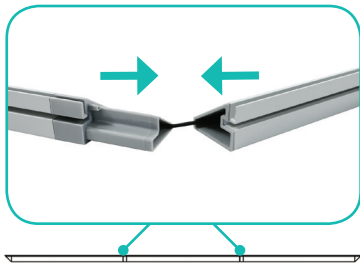

a. Expand each channel bar. Follow bungee to connect.

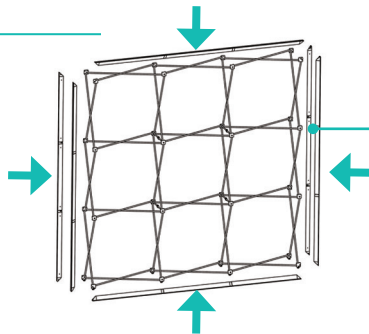

b. Attach channel bars to frame.

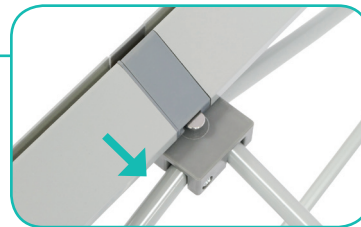

c. Slide channels bars onto frame, from top to bottom, then secure onto metal peg.



d. Attach the top and bottom end-caps on each side of the frame.


Hook Ladder Lights




a. Hang ladder lights by placing the brackets on the top and bottom of the frame.



b. Snap brackets onto ladder lights. Then place brackets on the top and bottom middle frame.

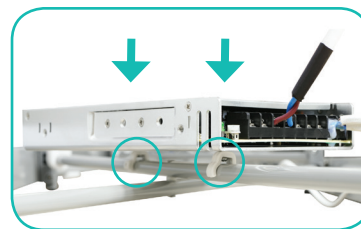

c. Place transformers on the bottom of the frame by snapping onto the cross sections.

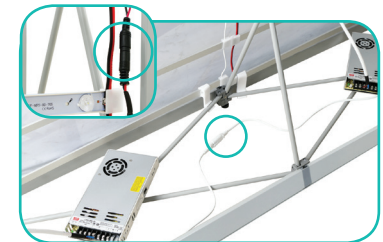

d. Connect all wire transformers and ladder lights together. Then plug each transformers together.

Install Graphic



a. In each corner, insert the silicone edge beading into the groove.



b. Then insert the remainder of the beading. Repeat blackout installation for the back frame.



c. Then repeat graphic installation on the end caps for each side.